

# 4+

Four Plus Video Intercom System



## Four Plus Premium Video Intercom System

### DOOR STATIONS

- Waterproof Vandal Resistant surface mount alloy housing
- 1/4 inch colour CCD camera / Resolution: 420TV Lines
- Built-in automatic 3 x LED lighting for night vision
- 68 degree wide angle field of view
- Minimum illumination 1.0 lux
- Dimensions: 98 (W) x 173 (H) x 25 (D)

Door Station Part Number. 100-958

Room Station Part Numbers.

100-956 Master Station Black

100-957 Slave Station Black

100-972 Master Station White

100-973 Slave Station White

Available accessories

100-978 Alloy Flush plate for door stations


100-906 Perspex Weathershield Tinted for door stations\*

100-907 Perspex Weathershield Clear for door stations\*

### ROOM STATIONS

- Surface mount Monitor/Room Station available in black & white
- 7inch colour LCD display
- Touch sensitive glass buttons
- Supports up to two video Door Stations and up to four video Room Stations
- Make intercom calls between two Room Stations
- Transfer door calls between Room Stations
- Monitor up to four optional CCTV cameras or other video input
- Image capture function with 64 image memory can be saved to SD Card (not supplied)
- Electric door lock release from Room Stations
- Adjustable Colour/Contrast/Brightness/Ring Volume
- Choice of 10 door bell chimes
- Dimensions: 260 (W) x 195 (H) x 35 (D)

### System Configuration

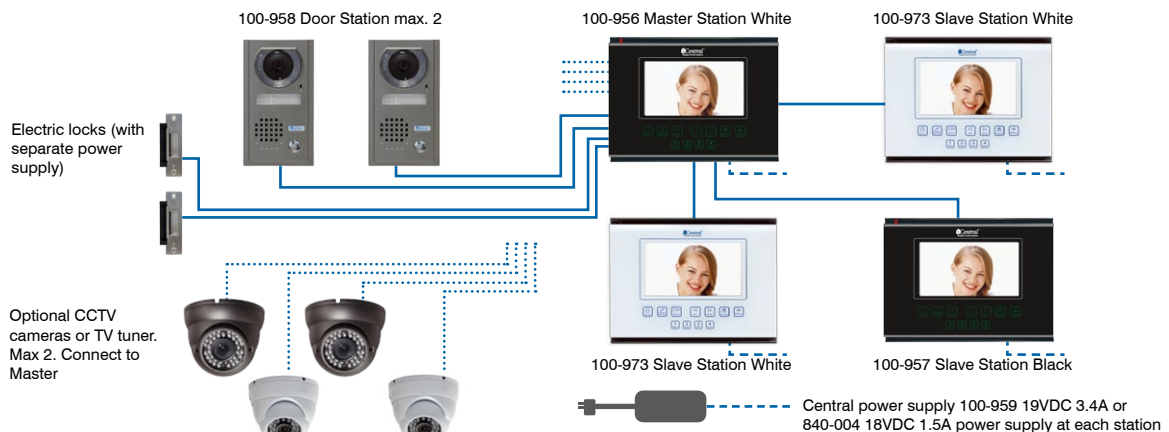

Door station/s to Room Station/s minimum wiring requirements: 4 core screened cable (100-960) + RG59 coax, star wired to master. \*In some installations the 100-958 Video Door Station may have audio feedback when used with a weathershield. A simple modification to the microphone gain is available - please ask when ordering.

Available from:



**iCentral**<sup>™</sup>

Intelligent Central Systems

A DIVISION OF **NESS** CORPORATION

[www.icentralsystems.com.au](http://www.icentralsystems.com.au)